

Project

Catalog #

Prepared by

Notes


Order #


Date

# **5 CCT Square LED Surface Mount Downlight**

5.5 Inch /7 Inch/9 Inch/ Flush Mount Ceiling Light







## DESCRIPTION

This elegant design product can provide exceptional performance in general lighting application, and can also serve as a cost effective temporary lighting solution. The 5.5"/7"/9" flush mount LED downlight provide 5 color temperatures of 2700K warm white, 3000K soft white, 3500K natural white, 4000K cool white or 5000K bright white for selection. This canless LED downlight is proved for top quality standard and safe operation. ETL-listed for your safety we uphold the highest standards for all our products by testing each product for optimal performance and safety. Our LED downlights are instant on with the latest in LED flicker -free technology for maximum eye comfort.




## DIMENSION

Туре	5.5inch	7inch	9inch
Length(Inch)	5.51	7.52	9.06
Wight(Inch)	5.51	7.52	9.06
Height(Inch)	2.36	2.36	2.36
Weight(LB)	1.35	1.79	2.6

# **ORDERING INFORMATION**

..36"(5.5 inch) ..36"(7 inch) ..36"(9 inch) 5.51"(5.5 inch) 7.52"(7 inch) 9.06"(9 inch)

Series	LJC-BMTD-G25.5CF10.5W-927-11-51	LJC-BMTD-G17CF13.5W-927-11-51	LJC-BMTD-G19CF18.5W-927-11-51
CRI	90	90	90
Power	10.5W	13.5W	18.5W
CCT	2700K/3000K/3500/ 4000K/5000K	2700K/3000K/3500/ 4000K/5000K	2700K/3000K/3500/ 4000K/5000K
Lumens	580LM	750LM	1050LM
Efficacy	90LM/W	95LM/W	100LM/W
Dimmable	10%-100%	10%-100%	10%-100%





# SPECIFICATION FEATURES

## CERTIFICATIONS

• ETL

•Title24 Certified

#### parameters

<ul> <li>Input Frequency</li> </ul>	120V,60HZ
<ul> <li>Ambient Temp</li> </ul>	-20 °C -40 °C
•Dimming	10%-100%

### MATERIAL

<ul> <li>Finish</li> </ul>	White
<ul> <li>Housing</li> </ul>	Die cast aluminur

- •Lens
- Die cast aluminum PC

## APPLICATION


- •Residential Airport
- •Hospitality Hospital
- •Retail Office

## WARRANTY

•5 years manufacturer warranty, consult support@runbisonlighting.com for more details.

•Terms and conditions may apply.



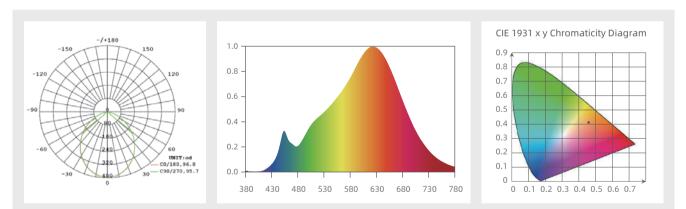

# PHOTOMETRY

# WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.

