



Project

Catalog #

Prepared by

Notes

Order #

Date

DUAL HEAD HIGH POWER LED EMERGENCY LIGHT



Red & Green Combo Exit Sign

DESCRIPTION



Get the ultimate combination of Exit Sign and Emergency Light -- all in one unit. A high-temperature thermoplastic housing protects against the worst elements, while LED lights require very little energy. Removable directional indicators are included with your Exit Sign. The LED exit sign is UL listed for damp locations, ideal for installation in areas where the light will be exposed to occasional condensation or moisture.

All of our Combo Emergency Light meet NFPA Life Safety Code 101, NED, OSHA and local codes. These commercial-grade emergency exit sign with lights ensures that your customers, employees, and visitors can quickly and easily find their way to safety in the event of a fire or other emergency.

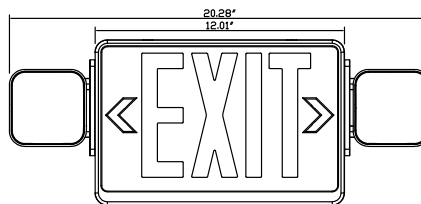

SPECIFICATION FEATURES



Temperature Range 0°C to 50°C



Dual Voltage Operation



90 Minute Run Time in Emergency Mode



5VA Flame Retardant

Construction:

- Rugged, injection-molded UL rated 5VA flame retardant, high-temperature thermoplastic housing
- Tool-less access provided for easy maintenance, universal J-box mounting pattern provided for simple installation.
- Optional Red and Green Letters.
- Rotatable LED lamp heads for widely application.
- Removable directional indicators are included.

Illumination:

- Each head contains 24pcs long-lasting, efficient, ultra-bright LEDs
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.

Electrical:

- Dual 120/277 voltage, 60Hz input
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing
- Built-in 9.6V 700mAH maintenance-free, rechargeable Ni-Cd battery that provides a minimum emergency duration of 90 minutes.
- Maximum 24 hour for full recharge time
- Operation temperature: 0°C to 50°C / 32°F to 122°F.
- Suitable for Damp location.

WARRANTY

This product is warranted for 5 years for all electronic and housing and 2 years for battery from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.



17578 Rowland St., City of Industry, CA 91748

Email: support@runbisonlighting.com